

VINYL FENCING

ORNAMENTAL	Pg 2
PICKET	Pg 3
SEMI-PRIVACY	Pg 4
PRIVACY	Pg 5
RAIL	Pg 6
DECKING	Pg 6
GATE	Pg 6
POST & RAIL	Pg 6
POLYRAIL®	Pg 6
POLYDECK®	Pg 6

*Aluminum reinforced privacy rails
Aluminum reinforced vinyl gates
Patented Hidden Picket Fasteners
Special fabricated fence styles and choice of caps
Tan and White colors*



ALUMINUM FENCING


RESIDENTIAL	Pg 7
ALUMINUM	
ATTRIBUTES	Pg 7
FINIAL OPTIONS	Pg
7	
INDUSTRIAL	Pg 8

*Heavy residential and industrial models
Patent Pending Picket Fastener - no screws
Patent Pending Rail Lock - easy installation
Standard sections rack up to 12" in a 6' section
Assembled panels - quicker installation*






ORNAMENTAL VINYL FENCING

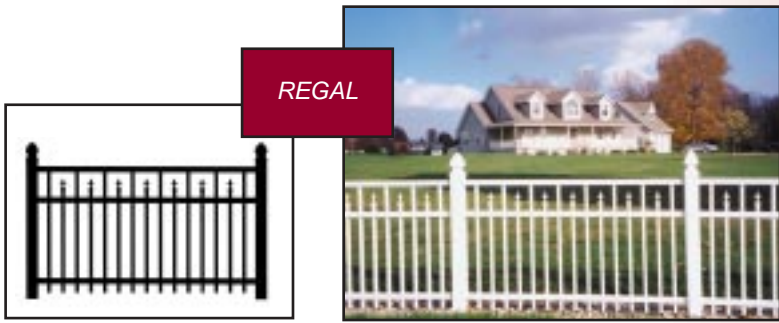

REGAL

REGAL FENCING


Height Available: 36", 42", 48", 60"
Color: White and Tan
Sections: 6' Centers
Post: 4" x 4"
Post Caps: Standard: Gothic
 Optional: Ball, Trim
Rails: 1³/₄" x 1³/₄"
Pickets: 1" x 1"
Picket Spacing: 3³/₈"
Aluminum Reinforcement: Top, Middle and Bottom Rail

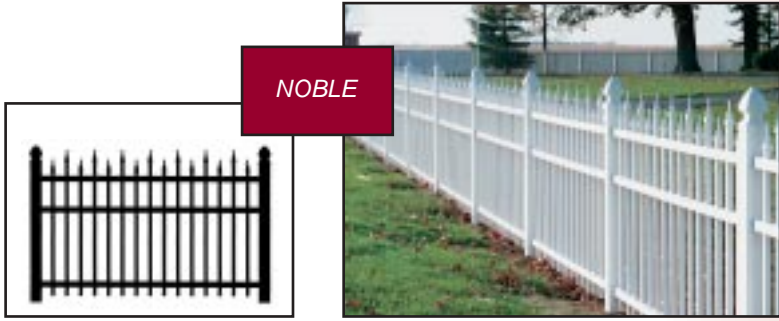

NOBLE

NOBLE FENCING

Height Available: 36", 42", 48", 60"
Color: White and Tan
Sections: 6' Centers
Post: 4" x 4"
Post Caps: Standard: Gothic
 Optional: Ball
Rails: 1³/₄" x 1³/₄"
Pickets: 1" x 1"
Picket Spacing: 3³/₈"
Aluminum Reinforcement: Top, Middle and Bottom Rail

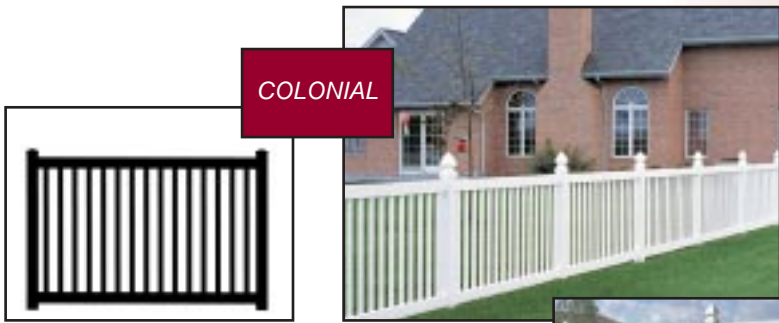

COLONIAL

COLONIAL FENCING

Height Available: 36", 42", 48", 50¹/₂"
 (Tall Colonial: 60", 72")
Color: White and Tan
Sections: 6' Centers
Post: 4" x 4"
Post Caps: Standard: Flat
 Optional: Gothic, Ball, Trim
Rails: 1³/₄" x 3¹/₂"
Pickets: 7⁷/₈" x 1¹/₂"
Picket Spacing: 2⁷/₈"
Aluminum Reinforcement: Bottom Rail
 on 50¹/₂" only (Tall Colonial: Bottom Rail)



Guide Specifications in the CSI 3-part format and Metric measurements can be found on our website www.DiggerSpecialties.com

ORNAMENTAL VINYL FENCING

Manufacturer: Offers vinyl fencing, railing, decking, and vinyl accents and components since 1984. Plant locations are in IN, NC, MO, GA.
Product Presentation: The unique Noble and Regal Ornamental Fence Systems have vertical pickets that are secured with 3 interlocking aluminum reinforced horizontal rails. Standard heights are listed above, custom fabrication is available.

Uses & Application: Single family homes, property developments, churches, companies, and swimming pools. (Consult local codes)

Product in Place: Fence- semi gloss finish. Product is clean and shipped in boxes for protection.

Assembly/Installation: Regal and Noble - factory assembled and boxed. Post holes are drilled 9" diameter x 36" minimum depth using concrete backfill. Check with local frost level codes. Sections slide and lock into prerouted posts.

Components & Parts: All gates have vinyl frames and aluminum reinforcement using powdered coated stainless steel hardware. All gates are built to match fence styles.

Materials/Finishes: Rigid P.V.C. exterior profile containing impact modifiers for cold weather and 10 parts TiO² for ultraviolet light resistance. These profiles meet or exceed the specifications ASTM F-924

Technical Support: Specify model, height, and color. All gates are aluminum reinforced. P.V.C. formula is based on 30 years of weather ability.

Codes & Certifications: Material meets or exceeds ASTM F-964, transferable lifetime warranty

Environmental Data: P.V.C. material is virgin compound that is recyclable.

Availability & Cost: Sold through authorized PolyVinyl Fence Dealers. Standard delivery is two weeks.

Operations & Maintenance: Virtually maintenance free. Clean with water and soap. Warranty claims are sent to the Warranty Department at Digger Specialties, Inc.

PICKET VINYL FENCING



02825/DIG

BuyLine 3048

SUPREME FENCING

Height Available: 48", 60", 72"

Color: White and Tan

Sections: 8' Centers
(Straight, Concave or Convex)

Post: 5" x 5"

Post Caps: Standard: Gothic
Optional: Ball


Rails: 1 1/2" x 5 1/2"

Pickets: 7/8" x 3"

Picket Spacing: 1 3/4"



SUPREME

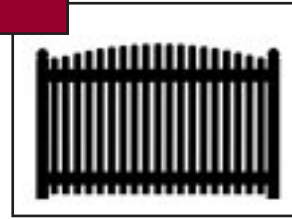

STERLING FENCING

Height Available: 36", 42", 48"

Color: White and Tan

Sections: 6' (Straight, Concave or Convex)

Post: 4" x 4"

Post Caps: Standard: Gothic
Optional: Ball

Rails: 1 3/4" x 3 1/2"

Pickets: 7/8" x 3"

Picket Spacing: 1 3/4"



STERLING



ELITE FENCING

Height Available: 36", 42", 48"

Color: White and Tan

Sections: 6' (Straight, Concave or Convex)

Post: 4" x 4"

Post Caps: Standard: Gothic
Optional: Ball


Rails: 1 3/4" x 3 1/2"

Pickets: 7/8" x 1 1/2"

Picket Spacing: 1 1/2"



ELITE

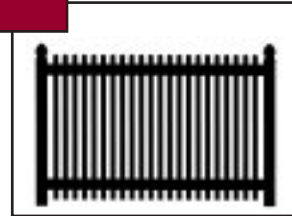

**Patented Hidden
Picket Attachments
Pat. 5601278**

PICKET VINYL FENCING

Manufacturer: Offers vinyl fencing, railing, decking, and vinyl accents and components since 1984. Plant locations are in IN, NC, MO, GA.

Product Presentation: The unique Fence Systems have vertical pickets that are secured with 3 interlocking Hidden Picket Fasteners.

Standard heights listed above, custom fabrication is an option.

Uses & Application: Single family homes, property developments, churches, companies, and backyards.

Product in Place: Fence- semi gloss finish. Product is clean and shipped in boxes for protection.

Assembly/Installation: Factory assembled and boxed. Post holes are drilled 9" diameter x 36" minimum depth using concrete backfill.

(Supreme model uses 12" diam.) Check with local frost level codes. Sections slide and lock into prerouted posts.

Components & Parts: All gates have vinyl frames and aluminum reinforcement using powdered coated stainless steel hardware.

All gates are built to match fence styles.

Materials/Finishes: Rigid P.V.C. exterior profile containing impact modifiers for cold weather and 10 parts TiO₂ for ultraviolet light resistance. These profiles meet or exceed the specifications ASTM F-924

Technical Support: Specify model, height, and color. All gates are aluminum reinforced. P.V.C. formula is based on 30 years of weather ability.

Codes & Certifications: Material meets or exceeds ASTM F-964, transferable lifetime warranty

Environmental Data: P.V.C. material is virgin compound that is recyclable.

Availability & Cost: Sold through authorized PolyVinyl Fence Dealers. Standard delivery is two weeks.


Operations & Maintenance: Virtually maintenance free. Clean with water and soap. Warranty claims are sent to the Warranty Department at Digger Specialties, Inc.

PRESTIGE FENCING

Height Available: 48", 60", 72"
Color: White and Tan
Sections: 8'
Post: 5" x 5"
Post Caps: Standard: Flat
 Optional: Gothic, Ball, Trim
Rails: 1 3/4" x 3 1/2"
Verticals: 7/8" x 6"
Vertical Spacing: 7/8"
Aluminum Reinforcement:
 Top and Bottom Rail



PRESTIGE

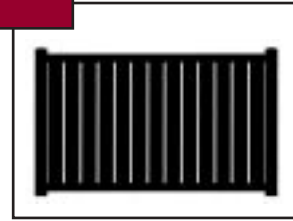

PRESIDENTIAL FENCING

Height Available: 48", 60", 72"
 (84", 96" Special Order)
Color: White and Tan
Sections: 8' Centers
Post: 5" x 5"
Post Caps: Standard: Flat
 Optional: Gothic, Ball, Trim
Rails: 1 3/4" x 5 1/2"
Verticals: Interlocking Verticals
Aluminum Reinforcement: Bottom Rail



PRESIDENTIAL





SUPERIOR FENCING


Height Available: 48", 60", 72"
 (84", 96" Special Order)
Color: White and Tan
Sections: 8' Centers
Post: 5" x 5"
Post Caps: Standard: Flat
 Optional: Gothic, Ball, Trim
Rails: 1 3/4" x 5 1/2"
Verticals: 7/8" x 11.3" Tongue and Groove
Aluminum Reinforcement: Bottom Rail



SUPERIOR

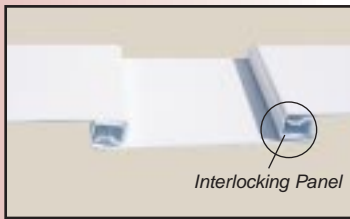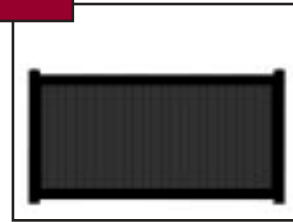

*Presidential and Royal
(Shadowbox effect)*

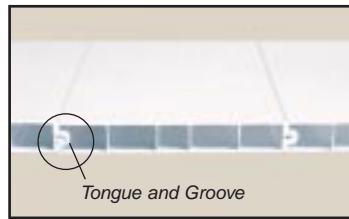

Superior and Majestic

SEMI-PRIVACY / PRIVACY VINYL FENCING

Manufacturer: Offers vinyl fencing, railing, decking, and vinyl accents and components since 1984. Plant locations are in IN, NC, MO, GA.
Product Presentation: Six styles offered. Unique interlocking panels (Presidential and Royal). Tongue and Groove Verticals (Superior and majestic), Privacy verticals with 7/8" spacing (Prestige and Dynasty). Special length and height panels available.
Uses & Application: Semi-Privacy / Privacy for single family homes, property developments, churches, companies, and swimming pools. (Consult local codes)
Product in Place: Privacy Fence- semi gloss finish. Product is clean and shipped in boxes for protection.
Assembly/Installation: Semi-Privacy and Privacy - factory fabricated (KD) and boxed. Post holes are drilled 12" diameter x 36" minimum depth using concrete backfill. Check with local frost level codes. Sections slide and lock into prerouted posts.
Components & Parts: All gates have vinyl frames and aluminum reinforcement using powdered coated stainless steel hardware. All gates are built to match fence styles.
Materials/Finishes: Rigid P.V.C. exterior profile containing impact modifiers for cold weather and 10 parts TiO₂ for ultraviolet light resistance. These profiles meet or exceed the specifications ASTM F-924
Technical Support: Specify model, height, and color. All gates are aluminum reinforced. P.V.C. formula is based on 30 years of weather ability.
Codes & Certifications: Material meets or exceeds ASTM F-964, transferable lifetime warranty
Environmental Data: P.V.C. material is virgin compound that is recyclable.
Availability & Cost: Sold through authorized PolyVinyl Fence Dealers. Standard delivery is two weeks.
Operations & Maintenance: Virtually maintenance free. Clean with water and soap. Warranty claims are sent to the Warranty Department at Digger Specialties, Inc.




POLYVINYL GATES



GATES

- Models:** Single and Double gates, all models
- Lengths:** Single: 4', 5', 6'
Double: 8', 10', 12'
- Heights:** Matches all styles
- Colors:** White and Tan
- Gate Posts:** 6063 T-6 Aluminum Stiffeners inside vinyl gate posts
- Double Gate Removable Center Post:** 6063 T-6 Aluminum Stiffeners inside vinyl gate posts
- Aluminum Reinforcement:** Entire gate frame
- Hardware:** Black powder coated stainless steel hardware

POLYVINYL POST & RAIL FENCING

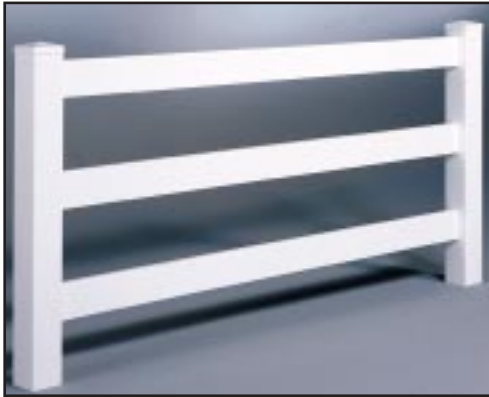

POST & RAIL FENCING

- Models:** 2 Rail 36" Height 11" spacing
3 Rail 48" Height 9" spacing
3 Rail 54" Height 11" spacing
4 Rail 54" Height 7" spacing
4 Rail 60" Height 9" spacing
- Colors:** White and Tan
- Posts:** 5" x 5" x .160 Wall 8' centers
- Post Caps:** Standard: Flat
Optional: Gothic, Ball, Trim
- Rails:** 1 1/2" x 5 1/2" x 16' .100 Wall
Optional 2" x 6" x 16' .120 Wall

POLYRAIL® & POLYDECK®



DECKING

- Lengths:** 12', 16', 20'
- Width:** 12" each
- Colors:** White, Tan, and Gray
- Styles:** Punched or Non-punched (water drainage)
- Options:** End covers: C channel 1" x 1 5/8" x 1" x 12'
L channel 1 5/8" x 3" x 12'
J cladding: 8" x 12'
12" x 12'
- Fasteners:** #10 x 2" Stainless steel deck screws
#8 x 3/4" Stainless steel trim screws

DECKING

Manufacturer: Offers vinyl fencing, railing, decking, and vinyl accents and components since 1984. Plant locations are in IN, NC, MO, GA.

Product Presentation: The 1 piece 12" wide vinyl boards interlock with a tongue and groove joint that hides the S.S. screws. Vinyl boards are fastened on 16" centers and can be punched or non-punched for water escape.

Uses & Application: Single family homes, duplexes, condominiums, boardwalks, piers, docks, and pools.

Product in Place: Vinyl Deck- Finished product is clean and protected in plastic sleeves for shipment. Vinyl decking has a non-skid-textured finish.

Assembly/Installation: Vinyl boards fastened on 16" centers. Lengths 12', 16', 20'. Trim channel on ends.

Components and Parts: Trim channel in "C" or "L" shape 8" and 12" J-Cladding to cover strings. S.S. Fasteners.

Materials/Finishes: Rigid P.V.C. exterior profile containing impact modifiers for cold weather and 10 parts TiO₂ pigment for ultraviolet light resistance.

Technical Support: Specify length, and color. Specify punctured or non-punched decking for water drainage.

Codes and Certifications: Material has transferable lifetime warranty.

Environmental Data: P.V.C. material is virgin compound that is recyclable.

Availability and Cost: Sold through authorized PolyVinyl Fence Dealers. Standard delivery is two weeks. Special order non-punched is 4 weeks.


Operations & Maintenance: Virtually maintenance free. Clean with water and soap. Warranty claims are sent to the Warranty Department at Digger Specialties, Inc.

3 RAIL W/ SPEAR POINTS-1131

Height: 36", 42", 48", 60", 72"
 Colors: Black, Bronze, Beige, Dark Green and White
 Posts: 2" x 2" x .090" Wall 6' centers
 Gate Posts: 2 1/2" x 2 1/2" x .125" Wall
 Post Caps: 2" x 2" Flat
 2 1/2" x 2 1/2" Flat
 Rails: 1" Height .085" Wall x 1 1/4" Width .065"
 Pickets: 3/4" x 3/4" .065" Wall
 Picket Spacing: 3.65" between pickets
 Finial Options: Spear, Triad, Quad



1131

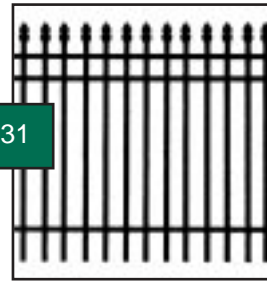


3 RAIL W/ ALT. SPEAR POINTS-1132

Height: 36", 42", 48", 60", 72"
 Colors: Black, Bronze, Beige, Dark Green and White
 Posts: 2" x 2" x .090" Wall 6' centers
 Gate Posts: 2 1/2" x 2 1/2" x .125" Wall
 Post Caps: 2" x 2" Flat
 2 1/2" x 2 1/2" Flat
 Rails: 1" Height .085" Wall x 1 1/4" Width .065"
 Pickets: 3/4" x 3/4" .065" Wall
 Picket Spacing: 3.65" between pickets
 Finial Options: Spear, Triad, Quad



1132

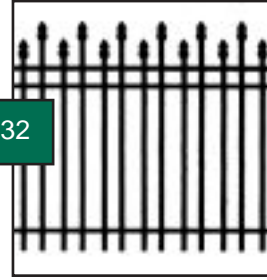


2 RAIL FLAT TOP-1220

Height: 54"
 Colors: Black, Bronze, Beige, Dark Green and White
 Posts: 2" x 2" x .090" Wall 6' centers
 Gate Posts: 2 1/2" x 2 1/2" x .125" Wall
 Post Caps: 2" x 2" Flat
 2 1/2" x 2 1/2" Flat
 Rails: 1" Height .085" Wall x 1 1/4" Width .065"
 Pickets: 3/4" x 3/4" .065" Wall
 Picket Spacing: 3.65" between pickets



1220

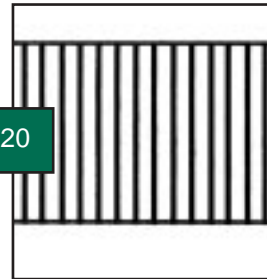


3 RAIL FLAT TOP-1230

Height: 36", 42", 48", 60", 72"
 Colors: Black, Bronze, Beige, Dark Green and White
 Posts: 2" x 2" x .090" Wall 6' centers
 Gate Posts: 2 1/2" x 2 1/2" x .125" Wall
 Post Caps: 2" x 2" Flat
 2 1/2" x 2 1/2" Flat
 Rails: 1" Height .085" Wall x 1 1/4" Width .065"
 Pickets: 3/4" x 3/4" .065" Wall
 Picket Spacing: 3.65" between pickets



1230




3 RAIL FLAT TOP W/ ALT. SPEAR POINTS-1233

Height: 36", 42", 48", 60", 72"
 Colors: Black, Bronze, Beige, Dark Green and White
 Posts: 2" x 2" x .090" Wall 6' centers
 Gate Posts: 2 1/2" x 2 1/2" x .125" Wall
 Post Caps: 2" x 2" Flat
 2 1/2" x 2 1/2" Flat
 Rails: 1" Height .085" Wall x 1 1/4" Width .065"
 Pickets: 3/4" x 3/4" .065" Wall
 Picket Spacing: 3.65" between pickets
 Finial Options: Spear, Triad, Quad



1233



Finial

- Spear
- Quad
- Triad



Hidden Rail Lock

(patent pending)




Hidden Picket Fasteners
(patent pending)

No unsightly screws!




Welded Gate
All rails and pickets are welded.



Racking
12" racking in 6' section

INDUSTRIAL ALUMINUM




2131




3 RAIL W/SPEAR POINTS-2131

Height: 48", 54", 60", 72", 84", 96"
Colors: Black, Bronze, Beige, Dark Green and White
Posts: 2 1/2" x 2 1/2" x .090 or .125" Wall 71 1/2" cntrs
Gate Posts: 4" x 4" x .125" Wall or 2 1/2" x 2 1/2" x .125" Wall
Post Caps: 2 1/2" x 2 1/2" Flat 4" x 4" Flat
Rails: 1 1/2" Height .100" Wall x 1 1/2" Width .070"
Pickets: 1" x 1" .065" Wall
Picket Spacing: 4" between pickets
Final Options: Spear, Triad, Quad




2132

Hidden Picket Fasteners
(patent pending)
No unsightly screws



3 RAIL W/ALT. SPEAR POINTS-2132

Height: 48", 54", 60", 72", 84", 96"
Colors: Black, Bronze, Beige, Dark Green and White
Posts: 2 1/2" x 2 1/2" x .090 or .125" Wall 71 1/2" cntrs
Gate Posts: 4" x 4" x .125" Wall or 2 1/2" x 2 1/2" x .125" Wall
Post Caps: 2 1/2" x 2 1/2" Flat 4" x 4" Flat
Rails: 1 1/2" Height .100" Wall x 1 1/2" Width .070"
Pickets: 1" x 1" .065" Wall
Picket Spacing: 4" between pickets
Final Options: Spear, Triad, Quad




2220

Hidden Rail Lock
(patent pending)



2 RAIL FLAT TOP-2220

Height: 54"
Colors: Black, Bronze, Beige, Dark Green and White
Posts: 2 1/2" x 2 1/2" x .090 or .125" Wall 71 1/2" cntrs
Gate Posts: 4" x 4" x .125" Wall or 2 1/2" x 2 1/2" x .125" Wall
Post Caps: 2 1/2" x 2 1/2" Flat, Gate option 4" x 4" Flat
Rails: 1 1/2" Height .100" Wall x 1 1/2" Width .070"
Pickets: 1" x 1" .065" Wall
Picket Spacing: 4" between pickets
Final Options: Spear, Triad, Quad




2230



3 RAIL FLAT TOP-2230

Height: 48", 54", 60", 72", 84", 96"
Colors: Black, Bronze, Beige, Dark Green and White
Posts: 2 1/2" x 2 1/2" x .090 or .125" Wall 71 1/2" cntrs
Gate Posts: 4" x 4" x .125" Wall or 2 1/2" x 2 1/2" x .125" Wall
Post Caps: 2 1/2" x 2 1/2" Flat 4" x 4" Flat
Rails: 1 1/2" Height .100" Wall x 1 1/2" Width .070"
Pickets: 1" x 1" .065" Wall
Picket Spacing: 4" between pickets



2233

Guide Specifications in the CSI 3-part format and Metric measurements can be found on our website www.DiggerSpecialties.com

3 RAIL FLAT TOP W/ALT. SPEAR-2233

Height: 48", 54", 60", 72", 84", 96"
Colors: Black, Bronze, Beige, Dark Green and White
Posts: 2 1/2" x 2 1/2" x .090 or .125" Wall 71 1/2" cntrs
Gate Posts: 4" x 4" x .125" Wall or 2 1/2" x 2 1/2" x .125" Wall
Post Caps: 2 1/2" x 2 1/2" Flat 4" x 4" Flat
Rails: 1 1/2" Height .100" Wall x 1 1/2" Width .070"
Pickets: 1" x 1" .065" Wall
Picket Spacing: 4" between pickets
Final Options: Spear, Triad, Quad

RESIDENTIAL & INDUSTRIAL ALUMINUM FENCING

Manufacturer: Aluminum fencing is shipped from Bremen, Indiana and our other three plant locations in NC, MO, and GA.
Product Presentation: Patent pending hidden picket fasteners for all verticals (NO SCREWS) and all rail locks to fasten all rails to posts. All-welded gate frames and pickets.
Uses & Application: Residential and industrial; homes, businesses, entryways, business parks, cemeteries, and swimming pools (consult local area codes).
Product in Place: Fence – Semi-gloss finish. Finished product is clean and protected for shipment.
Assembly/Installation: Residential and industrial models are factory assembled and boxed. Post holes are drilled 6" - 9" diameter x 36" minimum depth using concrete backfill. Check with local frost level codes. Sections slide and lock into pre-punched posts.
Components and Parts: All gates are welded aluminum (frames and verticals). All gates are built to match fence styles.
Materials/Finishes: Aluminum Alloy 6061 - T6 (Post/Rails) with TGIC Polyester Power Coating. Colors are Black, Bronze, Beige, Dark Green, and White.
Technical Support: Specify model number, height, and color. Installation instructions are available.
Availability and Cost: Sold through authorized Digger Specialties, Inc. Dealers. Standard delivery is two weeks.
Operations & Maintenance: Virtually maintenance free. Clean with water and soap. Warranty claims are sent to the Warranty Department at Digger Specialties, Inc.

Digger Specialties, Inc.
P.O. Box 241
3446 U.S. 6 East
Bremen, Indiana 46506
800-446-7659